

**UNIVERSITY COLLEGE TATI (UC TATI)****FINAL EXAMINATION QUESTION BOOKLET**

COURSE CODE	: DEE 2133
COURSE	: MICROCONTROLLER
SEMESTER/SESSION	: 2 - 2022/2023
DURATION	: 3 HOURS

**Instructions:**

1. This booklet contains **4** questions. Answer **ALL** questions.
2. All answers should be written in answer booklet.
3. Write legibly and draw sketches wherever required.
4. If in doubt, raise up your hands and ask the invigilator.

**DO NOT OPEN THIS BOOKLET UNTIL YOU ARE TOLD TO DO SO**

**THIS BOOKLET CONTAINS 9 PRINTED PAGES INCLUDING COVER PAGE**

MICROCONTROLLER (DEE 2133)

**QUESTION 1**

- a) Convert binary number into decimal number
- (i) 1000100<sub>2</sub> (2 marks)
  - (ii) 1011110011<sub>2</sub> (2 marks)
- b) State the different between microcontroller and microprocessor. (4 marks)
- c) Show five (5) assembly instruction used in 8051 microcontroller. (5 marks)
- d) Show the status of CY, AC and P flag after the addition of 38H and 2FH in the following instructions.
- ```
MOV A, #38H
ADD A, #2FH
```
- (5 marks)
- e) Show the description for the following assembler directives:
- i) ORG (2 marks)
  - ii) END (2 marks)
- f) Name the following register bank based on **PSW.4** and **PSW.3** logic state.

Table 1

| PSW.4 | PSW.3 | Bank  |
|-------|-------|-------|
| 0     | 1     | ..... |
| 1     | 0     | ..... |
| 1     | 1     | ..... |

(3 marks)

MICROCONTROLLER (DEE 2133)

**QUESTION 2**

- a) List three (3) 8051 conditional jump assembly language instruction. (3 marks)
- b) Write the description for the following jump instruction on Table 2.

Table 2

| Instruction | Description |
|-------------|-------------|
| DJNZ        | .....       |
| JB          | .....       |
| JBC         | .....       |

(3 marks)

- c) Compute the delay generated from the program below. Given the Crystal frequency = 11.0592MHz.

```

DELAY:  MOV R2, #200
AGAIN:  MOV R3, #250
HERE:   NOP
        NOP
        DJNZ R3, HERE
        DJNZ R2, AGAIN
        RET
    
```

(5 marks)

- d) Table 3 show the clocks per machine cycle for various 8051 versions.

Table 3

| Chip Maker                    | Clocks per Machine Cycle |
|-------------------------------|--------------------------|
| AT89C51 Atmel                 | 12                       |
| P89C54X2 Philips              | 6                        |
| DS5000 Dallas Semi            | 4                        |
| DS89C420/30/40/50 Dallas Semi | 1                        |

Compute the time period of the machine cycle for the following chip maker.

- i) AT89C51 (2 marks)
- ii) P89C54X2 (2 marks)
- iii) DS5000 (2 marks)

## MICROCONTROLLER (DEE 2133)

- 
- e) Illustrate the *basic circuit* schematic diagram of AT89C51 microcontroller. (Use attached paper at the attachment) (5 marks)
- f) Give three (3) additional function at Port 3 of 8051 microcontroller. (3 marks)

**QUESTION 3**

- a) Produce a program to turn ON and OFF of AT89C51 pin P1.3 with 500ms delay. (5 marks)
- b) A switch (SPDT) is connected to pin P1.5 of AT89C51 and LED to pin P2.7. Produce a program to get the status of the switch and indicate it at LED. (4 marks)
- c) Show the status of register 'A' and 'B' after the multiplication of 25H and 65H in the following instruction.

```
MOV A, #25H
MOV B, #65H
MUL AB
```

(4 marks)

- d) Show the status of register 'A' and 'B' after the division of 95H and 10H in the following instruction.

```
MOV A, #95
MOV B, #10
DIV AB
```

(4 marks)

- e) A two (2) switch (SPDT) is connected to pin P2.1 and P2.2 of AT89C51 and LED to pin P3.0. Produce a program to turn ON LED if the logic of both switches is LOW. LED is OFF when both switch is HIGH.

(8 marks)

MICROCONTROLLER (DEE 2133)

---


**QUESTION 4**

a) Illustrate the schematic diagram consist of one (1) 16x2 LCD display and one (1) pushbutton including basic circuit and all necessary labelling.


(10 marks)

b) Produce a program achieve the following task:

When Pushbutton pressed, LCD displayed as follows.

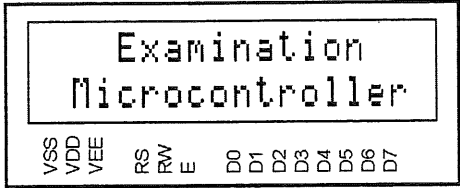

When Pushbutton released, LCD displayed as follows.

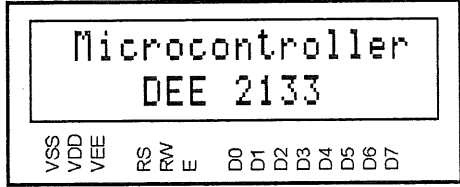


(15 marks)

-----End of question-----



MICROCONTROLLER (DEE 2133)

ATTACHMENT 1 : Illustrate your answer for question 2.e)

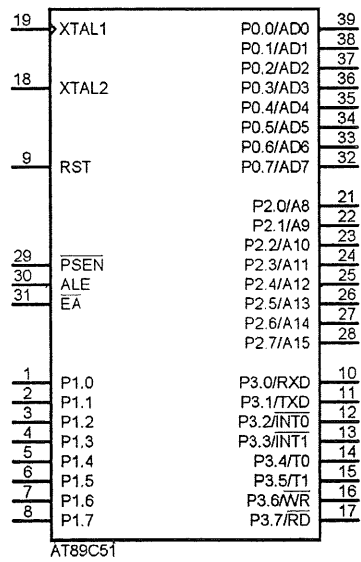

MICROCONTROLLER (DEE 2133)

ATTACHMENT 2 : Illustrate your answer for question 4.a)

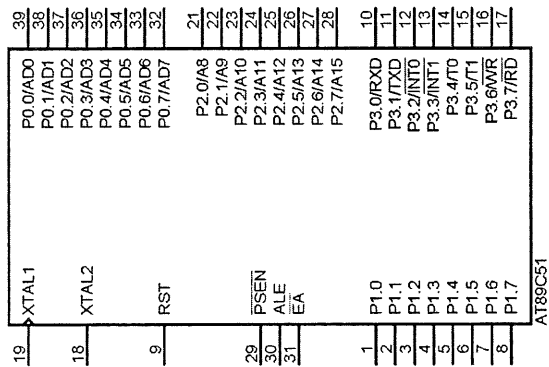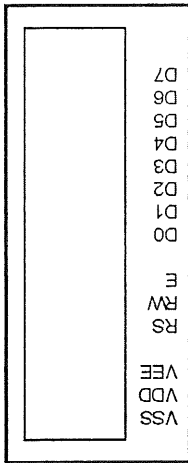

## MICROCONTROLLER (DEE 2133)

**ATTACHMENT 3 : CODE FORMATTING****Declaration**

```
#define xxxx P2

sbit yyyy at P2_3_bit;

int zyzy;
```

**Prototype**

```
void xyxyx();
```

**LCD**

```
Lcd_Init();

Lcd_Cmd(_LCD_CLEAR);

Lcd_Cmd(_LCD_CURSOR_OFF);

LCD_Out(1,4,word1);
```

**Others**

```
void main()
{
    while(1)
    {

    }
}
```

```
if(suis==1)
{

}
else
{

}
-----
```

```
for(int i=0; i>8; i++)
{

}
```

```
-----

if(suis1==1)
{

}
if(suis2==1)
{

}
else
{

}
-----
```

```
while(suis==0)
{

}
-----
```

## MICROCONTROLLER (DEE 2133)

## ATTACHMENT 4 : LCD Command

| LCD Command            | Purpose                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------|
| _LCD_FIRST_ROW         | Move cursor to the 1st row                                                                                          |
| _LCD_SECOND_ROW        | Move cursor to the 2nd row                                                                                          |
| _LCD_THIRD_ROW         | Move cursor to the 3rd row                                                                                          |
| _LCD_FOURTH_ROW        | Move cursor to the 4th row                                                                                          |
| _LCD_CLEAR             | Clear display                                                                                                       |
| _LCD_RETURN_HOME       | Return cursor to home position, returns a shifted display to its original position. Display data RAM is unaffected. |
| _LCD_CURSOR_OFF        | Turn off cursor                                                                                                     |
| _LCD_UNDERLINE_ON      | Underline cursor on                                                                                                 |
| _LCD_BLINK_CURSOR_ON   | Blink cursor on                                                                                                     |
| _LCD_MOVE_CURSOR_LEFT  | Move cursor left without changing display data RAM                                                                  |
| _LCD_MOVE_CURSOR_RIGHT | Move cursor right without changing display data RAM                                                                 |
| _LCD_TURN_ON           | Turn LCD display on                                                                                                 |
| _LCD_TURN_OFF          | Turn LCD display off                                                                                                |
| _LCD_SHIFT_LEFT        | Shift display left without changing display data RAM                                                                |
| _LCD_SHIFT_RIGHT       | Shift display right without changing display data RAM                                                               |

